


SPEC SHEET: T6XPSM-PERF

6' STANDARD PERFORATED PICNIC TABLE surface mount


Wt. 285 lbs




top view

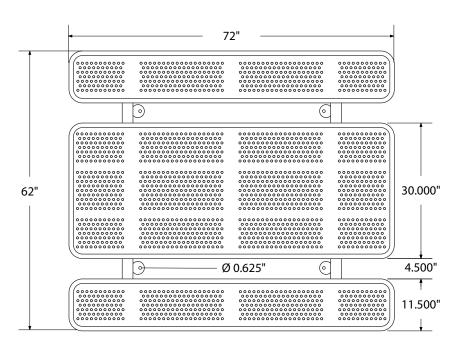

front view

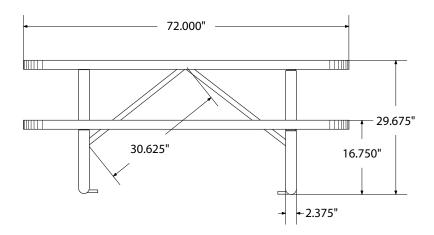

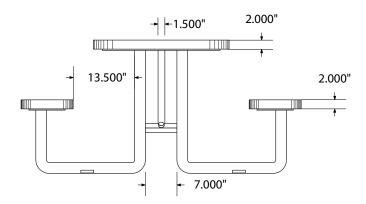

product details



Coated Surfaces:

- Thermoplastic coatedCopolymer-based,
- environmentally safeDoes not fade, crack, peel
- or warp

 Applied at a thickness of
- 25-30 mils.
- 5 Year warranty on coating



Construction:

- Seats and tops 11 gauge steel
- 2³/₈" tubular understructure
- Understructure galvanized steel
- Understructure finish black
 polyester powder coated
- Nuts, washers and bolts galvanized steel

mounting types

P = Portable : no mount

SM = Surface Mount: concrete anchors through discs welded to legs

IG= In-Ground: J-rods set in concrete through discs welded to legs

